

DOMO

CELOSÍA

DE REVESTIMIENTO

CELOSÍA DE ALUMINIO · ALUMINIUM SCREEN

CELOSÍA SOBRE SOPORTE MECANIZADO


Celosía de lamas atornilladas sobre el soporte 279, que se sirve mecanizado según la lama: celosía para atornillar 280, de 50 × 33 mm, con taladros cada 42 mm (279P420), o ángulo con portatornillos 256, de 33 × 17,5 mm, con taladros cada 17,5 mm (279P175). El mecanizado no tiene punto de inicio: las barras se alinean para que coincidan los taladros y después se cortan en las partes necesarias.

SCREEN ON MACHINED SUPPORT

Screen of slats screwed onto the 279 support, supplied machined to suit the slat: 280 screw-on screen slat, 50 × 33 mm, with holes every 42 mm (279P420), or 256 angle with screw port, 33 × 17.5 mm, with holes every 17.5 mm (279P175). The machining has no starting point: bars are lined up so the holes match, then cut as needed.


MONTAJE / MOUNTING

Montaje con ángulo 256

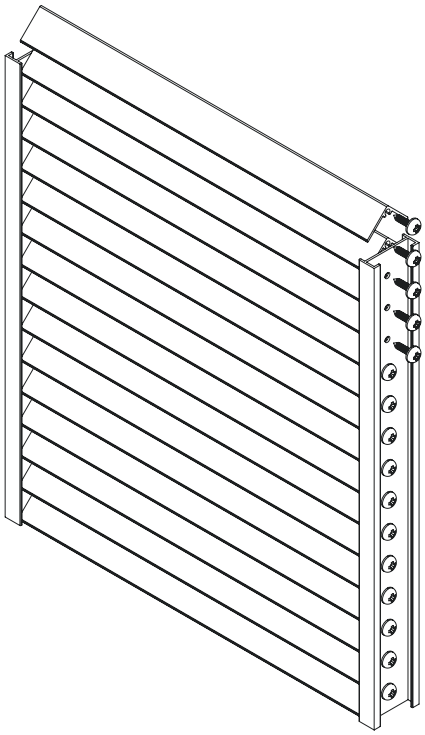


Assembly with 256 angle


Perfiles 279, 280 y 256 · mm



Ref. 279




Ref. 280



Ref. 256

Profiles 279, 280 and 256 · mm

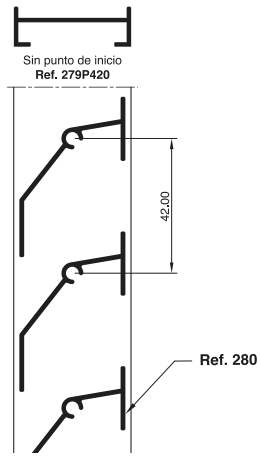

CELOSÍA 280 SOBRE 279P420 · MM

FICHA INFORMATIVA / INFORMATIVE SHEET

El catálogo del fabricante no publica ensayos de prestaciones para este sistema: esta ficha recoge su geometría, perfiles y montaje.

The manufacturer's catalogue publishes no performance tests for this system: this sheet covers its geometry, profiles and mounting.

CARACTERÍSTICAS / FEATURES

Soporte 279 Support 279	**36,5 × 12,5 mm**
Taladro del soporte Support hole	**Ø 5,5 mm**
Paso con celosía 280 Pitch with slat 280	**42 mm · 279P420**
Paso con ángulo 256 Pitch with angle 256	**17,5 mm · 279P175**

Datos del fabricante: catálogo DOMO Revestimientos v1.1 (INDALSU), págs. 73–77. Valores orientativos; consultar cálculo para cada obra.