

DOMO

LAMA

MACHIHEMBRADA

REVESTIMIENTO DE PARAMENTOS · WALL CLADDING

REVESTIMIENTO DE LAMA MACHIHEMBRADA


Lamas de aluminio que encajan entre sí por machihembrado y se anclan al paramento con el perfil clip 7393. Cada lama tiene 30 mm de frente y deja un hueco de 30 mm hasta la siguiente. La lama machihembrada 690 lleva dos frentes por pieza; la lama inicial 691 y la de remate final 692 cierran el paño, y el esquinero 693 resuelve las esquinas. Módulos tipo de 3, 5 y 7 lamas.

TONGUE-AND-GROOVE SLAT CLADDING


Aluminium slats that interlock by tongue and groove and are anchored to the wall with the 7393 clip profile. Each slat has a 30 mm face and leaves a 30 mm gap to the next. The 690 tongue-and-groove slat carries two faces per piece; the 691 starter slat and 692 end slat close the run, and the 693 corner piece resolves the corners. Standard modules of 3, 5 and 7 slats.

MONTAJE / MOUNTING

Módulo tipo de 3 lamas · sección, cotas en mm

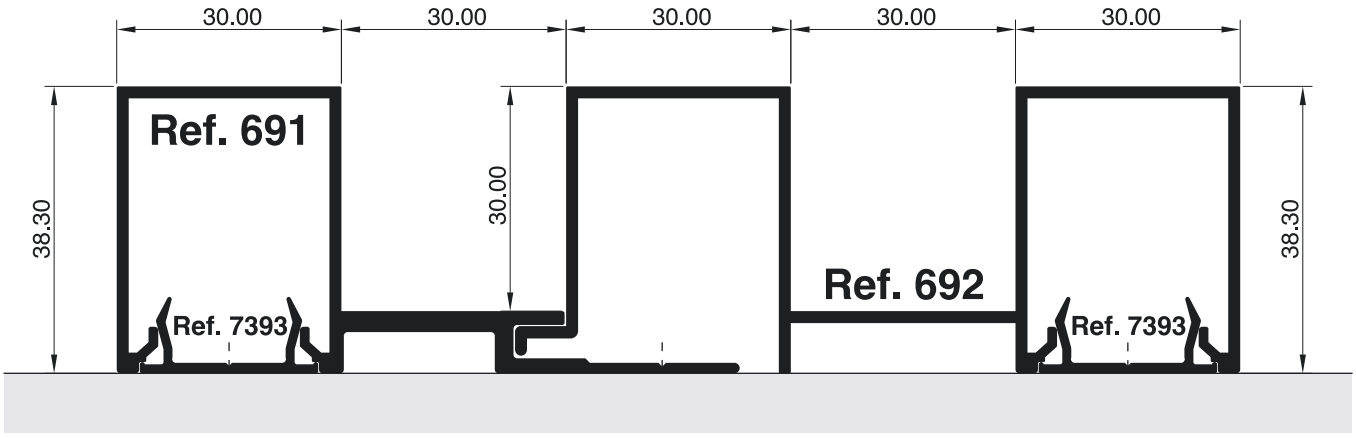

Standard 3-slat module · section, mm

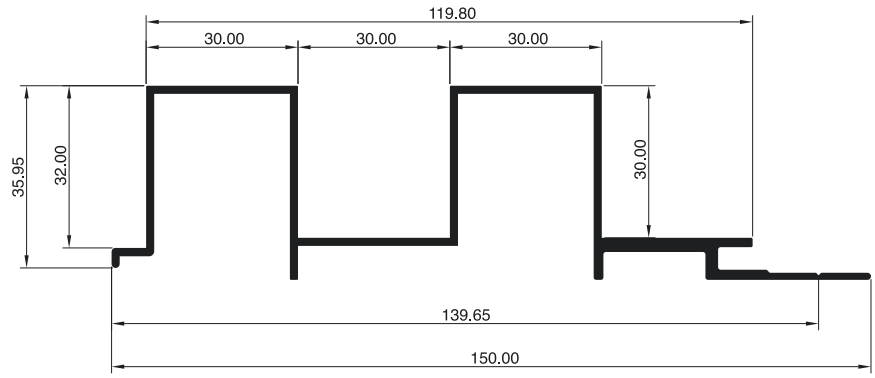

Ref. 690

LAMA MACHIHEMBRADA · MM

FICHA INFORMATIVA / INFORMATIVE SHEET

El catálogo del fabricante no publica ensayos de prestaciones para este sistema: esta ficha recoge su geometría, perfiles y montaje.

The manufacturer's catalogue publishes no performance tests for this system: this sheet covers its geometry, profiles and mounting.

CARACTERÍSTICAS / FEATURES

Frente de lama Slat face	**30 mm**	Anclaje Anchoring	**Perfil clip 7393**
Hueco entre lamas Gap between slats	**30 mm**	Módulos tipo Standard modules	**3 · 5 · 7 lamas**
Fondo Depth	**38,3 mm**	Esquina Corner	**Esquinero 693**

Datos del fabricante: catálogo DOMO Revestimientos v1.1 (INDALSU), págs. 8–16. Valores orientativos; consultar cálculo para cada obra.